

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number  
**WO 2005/089055 A2**

(51) International Patent Classification: Not classified

(21) International Application Number:  
PCT/IB2005/000730

(22) International Filing Date: 21 March 2005 (21.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/554,605 19 March 2004 (19.03.2004) US

(71) Applicant: NORTEL NETWORKS LIMITED  
[CA/CA]; 2351 Boulevard Alfred-Nobel, St. Laurent, Quebec H4S 2A9 (CA).

(72) Inventors: CHU, Chung-Cheung; 9370 Rameau Street, Brossard, Quebec J4X 2M3 (CA). RABIPOUR, Raffi; 5745 Blossom Avenue, Cote Saint-Luc, Quebec H4M 2Y1 (CA). YUE, Peter; 987 White Street, Apt. 204, St. Laurent, Quebec H4M 2Y1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMMUNICATING PROCESSING CAPABILITIES ALONG A COMMUNICATIONS PATH

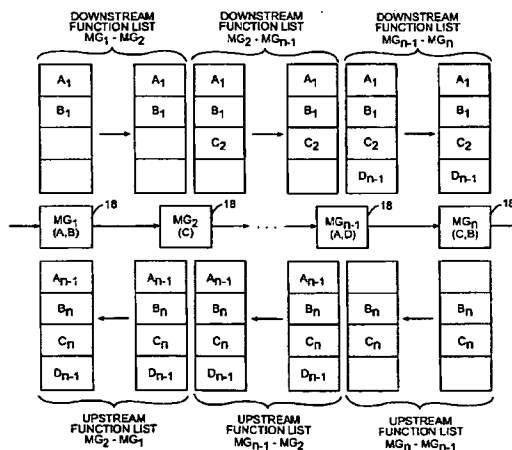

(57) Abstract: The present invention provides a technique for determining which nodes are to provide various functions on traffic along a particular communication path. Generally, a communication path may include multiple nodes between which and through which traffic is routed. These nodes may include the communication terminals at either end of the communication path, as well as various types of routing nodes along the communication path. Each node will send to other nodes in the communication path information identifying the local functions it is capable of providing to the traffic carried in the communication path, and if available, remote functions capable of being provided to the traffic by other nodes in the communication path. Each node will receive from other nodes in the communication path information bearing on the remote functions. Each node will access criteria to determine whether any local functions should be applied to the traffic.

**COMMUNICATING PROCESSING CAPABILITIES ALONG A  
COMMUNICATIONS PATH**

[0001] This application claims the benefit of U.S. provisional application  
5 serial number 60/554,605 filed March 19, 2004, the disclosure of which is  
hereby incorporated by reference in its entirety.

Field of the Invention

[0002] The present invention relates to telecommunications, and in  
10 particular to exchanging and determining processing capabilities along the  
nodes of a communication path.

Background of the Invention

[0003] Communication information, including data, audio, video, and voice  
15 information, may now travel in circuit-switched or packet-switched forms at  
any given time over disparate types of networks. The various nodes along a  
communication path may perform various types of processing functions in  
addition to routing or forwarding the information toward the next node. These  
features may include signal processing functions, such as controlling gain and  
20 providing noise reduction and echo cancellation. In many cases, the various  
nodes along a particular communication path may provide the same and/or  
different communication functions. For example, multiple nodes may provide  
echo cancellation and noise reduction, while other nodes may provide gain  
control. Further, other nodes may provide echo cancellation, noise reduction,  
25 and gain control. Accordingly, all of the communication nodes must be  
properly controlled and coordinated to provide the appropriate functions at the  
appropriate places and times. If provisioning of these functions is not properly  
implemented, the information being transferred along the path may be  
degraded. Such control and coordination is difficult to implement for relatively  
30 static conditions, and even more difficult to implement when the  
communication path dynamically changes, such as when a node fails and  
rerouting of the communication path is required. As such, there is a need for  
an effective and efficient technique to control and coordinate the provisioning

of processing functions among the various nodes along a communication path.

#### Summary of the Invention

5   **[0004]**   The present invention provides a technique for determining which nodes are to provide various functions on traffic along a particular communication path. Generally, a communication path may include multiple nodes between which and through which traffic is routed. These nodes may include the communication terminals at either end of the communication path,  
10 as well as various types of routing nodes along the communication path. Each node will send to other nodes in the communication path information identifying the local functions it is capable of providing to the traffic carried in the communication path, and if available, remote functions capable of being provided to the traffic by other nodes in the communication path. Each node  
15 will receive from other nodes in the communication path information bearing on the remote functions.

**[0005]**   In one embodiment, the information pertaining to the remote functions is received by the most proximate upstream and downstream remote nodes. Accordingly, each node in the communication path will  
20 successively receive information from an upstream or downstream node, add the local functions, and then forward a cumulative list of the downstream or upstream capabilities to the most proximate upstream or downstream nodes. As such, each node within the communication path can determine the various functions that are capable of being provided to the traffic in the  
25 communication path by the various nodes. Each node will then access selection criteria to determine whether any local functions should be applied to the traffic carried along the communication path.

**[0006]**   Those skilled in the art will appreciate the scope of the present invention and realize additional aspects thereof after reading the following  
30 detailed description of the preferred embodiments in association with the accompanying drawing figures.

Brief Description of the Drawing Figures

[0007] The accompanying drawing figures incorporated in and forming a part of this specification illustrate several aspects of the invention, and together with the description serve to explain the principles of the invention.

5 [0008] FIGURE 1 is a block representation of a communication environment according to one embodiment of the present invention.

[0009] FIGURE 2 is a block diagram illustrating how nodes along a communication path exchange function lists according to one embodiment of the present invention.

10 [0010] FIGURE 3 is a block representation of a communication path established between two terminals according to one embodiment of the present invention.

[0011] FIGURES 4 and 5 are tables providing exemplary rule sets for the communication environment of Figure 3.

15 [0012] FIGURE 6 is a block representation of a routing node according to one embodiment of the present invention.

[0013] FIGURE 7 is a block representation of a communication terminal according to one embodiment of the present invention.

20 Detailed Description of the Preferred Embodiments

[0014] The embodiments set forth below represent the necessary information to enable those skilled in the art to practice the invention and illustrate the best mode of practicing the invention. Upon reading the following description in light of the accompanying drawing figures, those skilled in the art will understand the concepts of the invention and will recognize applications of these concepts not particularly addressed herein. It should be understood that these concepts and applications fall within the scope of the disclosure and the accompanying claims.

25 [0015] The present invention provides an efficient and effective technique for various nodes along a communication path in a communication environment to identify each other's capabilities and apply the appropriate functions to the information being carried along the communication path according to defined criteria. With reference to Figure 1, a communication environment 10 is illustrated with numerous communication nodes. These

30

nodes include communication terminals 12, which represent the endpoints of a communication path, which extends through various routing nodes 16 between and within numerous communication networks 14. The communication networks 14 may support various types of communications, wherein the routing nodes 16 between the communication networks 14 may act as media gateways, which facilitate interworking between disparate communication technologies. The routing nodes 16 within the communication networks 14 are used to route traffic along the communication path through a given communication network 14. The routing nodes 16 that interface through wired or wireless communications with the communication terminals 12 represent the relative access points for the associated communication network 14, and facilitate communications with the corresponding communication network 14 and the communication terminals 12. These access points may take the form of wireless local area network (WLAN) access points, wireless wide area networks (WWAN), Ethernet access points, cellular base stations, and the like, or any combination of such nodes. The communication terminals 12 are illustrated as being those supporting voice communications, but other information, including real-time and non-real-time data, may be communicated across the communication path and benefit from the present invention.

[0016] In essence, the present invention operates to provide end-to-end coordination of processing functions available at any of the nodes along the communication path, including the routing nodes 16 and the communication terminals 12. The coordination of processing functions along the communication path generally requires one or more of the following. The nodes are able to provide their capabilities to other nodes, as well as obtain the capability of other nodes along the communication path. When multiple nodes can support the same functions, the involved nodes may be operable to resolve the conflict and determine whether or not they should implement a certain function on the data being carried along the communication path. When network topologies change, the affected nodes may be operable to effectively update each other relative to these changes. Similarly, the nodes may be operable to control the relative provisioning of functions in a dynamic

fashion as would be desired when network changes impact the communication path.

**[0017]** In general, the nodes along the communication path determine each other's relative capabilities to provide various functions, and individually  
5 determine whether to implement certain functions in light of a rule set that is available to all the nodes along the communication path. Again, these nodes may also include just the routing nodes 16 forming the communication path, or may include the communication terminals 12. The rule set will address the needs of a particular communication over a communication path, as well as  
10 conflicts amongst nodes, when these nodes can provide the same functionality. In operation, there is a set of predefined functions that may be provided by the various nodes along the communication path. A set of functions is defined and updated for a type of communication. For example, a set of voice signal processing functions is defined for voice communication  
15 applications of the protocol. A set of video signal processing functions is defined for video communication applications of the protocol. Each set can be defined and updated individually by the relevant standard or industry representing body.

**[0018]** Although each node may not be able to provide all of the functions,  
20 each node will be aware of all possible functions that may be provided by it or other nodes. In general, communications will travel in one direction along the communication path. If bidirectional communications are required, two communication paths may be initiated. Notably, the bidirectional communication paths may travel through the same nodes, although such is  
25 not required.

**[0019]** For each communication path that is supporting traffic in one direction, each node will provide a list of its features to at least the next upstream and downstream nodes along the communication path. When each node receives a list of features from an adjacent node, it will make note of the  
30 available features of the other nodes and forward this information to the respective upstream and downstream nodes. As such, each node along the communication path will ultimately recognize the capabilities of the other nodes along the communication path or at least the fact that other nodes

along the communication path, either upstream or downstream, are capable of providing certain functions.

**[0020]** Operation of the present invention is better understood in association with the illustrative example of Figure 2. Assume that a communication path extends between two communication terminals 12 (not shown in Figure 2) through numerous media gateways (MGs) 18. For the purposes of example, the media gateways 18 are referenced as media gateway  $MG_1$ , media gateway  $MG_2$ , media gateway  $MG_{n-1}$ , and media gateway  $MG_n$ . Further assume that the communication path is established wherein traffic travels from media gateway  $MG_1$  toward media gateway  $MG_n$ . Assume that media gateway  $MG_1$  supports functions A and B, media gateway  $MG_2$  supports function C, media gateway  $MG_{n-1}$  supports functions A and D, and media gateway  $MG_n$  supports functions C and B.

**[0021]** Each media gateway 18 will thus function as follows. Initially, media gateway  $MG_1$  will create a downstream function list  $MG_1-MG_2$  identifying the functions A and B, which are provided by media gateway  $MG_1$ . The downstream function list  $MG_1-MG_2$  may identify the functions as being those provided by  $MG_1$ . As such, these functions are referenced as  $A_1$  and  $B_1$ , respectively. The downstream function list  $MG_1-MG_2$  is sent to media gateway  $MG_2$ , which is the next media gateway 18 downstream of media gateway  $MG_1$  and along the communication path. Media gateway  $MG_2$  will receive the downstream function list  $MG_1-MG_2$  from media gateway  $MG_1$  and create another downstream function list  $MG_2-MG_{n-1}$ , which identifies the functions A and B provided by media gateway  $MG_1$ , as well as function C, which is provided by media gateway  $MG_2$ . The downstream function list  $MG_2-MG_{n-1}$  is then sent to the next downstream media gateway  $MG_{n-1}$ . Media gateway  $MG_{n-1}$  will receive the downstream function list  $MG_2-MG_{n-1}$  and determine that media gateway  $MG_1$  can provide functions A and B, while media gateway  $MG_2$  can provide function C. Next, media gateway  $MG_{n-1}$  will create a downstream function list  $MG_{n-1}-MG_n$ , which will identify media gateway  $MG_1$  as being able to provide functions A and B, media gateway  $MG_2$  as being able to provide function C, and media gateway  $MG_{n-1}$  as being able to provide function D and perhaps function A.

[0022] Accordingly, media gateway  $MG_n$  will be operable to recognize that media gateway  $MG_1$  is capable of providing functions A and B, media gateway  $MG_2$  is capable of providing function C, and media gateway  $MG_{n-1}$  is capable of providing at least function D, and perhaps function A. Thus, media gateway  $MG_n$  is informed as to which functions can be provided upstream in the communication path, and will thus be operable to determine which functions it can provide to the data traveling along the communication path.

[0023] A similar operation is provided for upstream propagation. As such, media gateway  $MG_n$  will create an upstream function list  $MG_n$ - $MG_{n-1}$  indicating that  $MG_n$  can provide functions B and C. Media gateway  $MG_{n-1}$  will receive the upstream function list  $MG_n$ - $MG_{n-1}$  and create an upstream function list  $MG_{n-1}$ - $MG_2$  indicating that media gateway  $MG_n$  can provide functions B and C, while media gateway  $MG_{n-1}$  can provide functions A and D. Media gateway  $MG_2$  will receive the upstream function list  $MG_{n-1}$ - $MG_2$  and will create an upstream function list  $MG_2$ - $MG_1$  indicating that media gateway  $MG_n$  can provide features C and B, media gateway  $MG_{n-1}$  can provide functions A and D, and perhaps (although not shown) indicate that media gateway  $MG_2$  can provide function C. As such, media gateway  $MG_1$  upon receiving upstream function list  $MG_2$ - $MG_1$  will be able to determine the available functions and perhaps the media gateways 18 from which those functions are provided downstream along the communication path. At this point, each media gateway 18 along the communication path is aware of the available functions upstream and downstream along the communication path.

[0024] As illustrated, certain of the media gateways 18 can provide the same function. Generally, only one of the media gateways 18 will provide a given function at a given time. Accordingly, the media gateways 18 will access a common rule set, which will provide criteria for allowing each of the media gateways 18 to determine whether or not to implement a particular function in light of the capabilities of the other media gateways 18. For example, the criteria in the rule set may dictate that function A be provided by media gateway  $MG_1$ , and function B be provided by media gateway  $MG_n$ . Both media gateway  $MG_1$  and media gateway  $MG_n$  can access the rule set and independently determine whether or not to activate function B, and process the information carried along the communication path accordingly.



[0025] Notably, the functions provided by the various media gateways 18 and included in the function list may be associated with additional attributes that provide information bearing on the availability of the function, constraints associated with the function, characteristics of the function, and limitations of the functions. In particular, these attributes may relate to the relative capability of the node to implement a feature, or of the associated network to support the feature on a static or dynamic basis. For example, the attributes associated with a voice processing function may include jitter, delay, and bandwidth requirements or limitations. As such, the criteria in the rule set may help resolve conflicts of multiple media gateways 18 being able to provide a given function based on the attributes associated with providing the function at the different media gateways 18. Each of the media gateways 18 will essentially create a data structure, such as a database or table, identifying the functions it can provide as well as the functions that other media gateways 18 upstream or downstream along the communication path may provide. Again, these functions may be associated with attributes. The rule sets may be accessed from or provided by a centralized service node in a periodic or as-needed fashion. In one embodiment, the rule set may be a predefined rule set, wherein each node supporting the protocol has a copy.

[0026] Turning now to Figure 3, a basic communication environment is illustrated wherein rule sets defined in the tables of Figures 4 and 5 are provided to allow the various communicating nodes to determine what functions should be implemented and where those functions should be implemented. Assume that communication terminals 12 will communicate with each other through three nodes: an originating node 20, an intermediate node 22, and a terminating node 24. Further assume that the curved arrows on either side of the diagram illustrate acoustic echoes 26 and electrically induced echoes 28. In this implementation, each of the originating node 20, intermediate node 22, and terminating node 24 is capable of supporting the electrical echo cancellation (EC), acoustic echo cancellation (AEC), noise reduction (NR), and automatic level control (ALC) for the selected communication path.

[0027] From the tables of Figures 4 and 5, each of these various functions EC, AEC, NR, and ALC are provided depending on the type of communication

terminals 12. The tables set forth the criteria defining the preferred locations where a function should be activated when multiple nodes on the same communication path are capable of providing the same function. As illustrated, the communication terminals 12 on either side of the

5 communication network may take the form of a mobile terminal, such as a cellular telephone, an Internet Protocol (IP) telephone supporting packet-switched communications, or a Plain Old Telephone System (POTS) telephone. For each function in the table, each combination of the types of communication terminals 12 is provided. The criteria provides instructions for

10 each of the originating node 20, intermediate node 22, and terminating node 24 to either disable or assign a low, medium, or high preference for implementing the function. In the echo cancellation (EC) example, and with continuing reference to Figures 3 and 4, when the left-most communication terminal 12 is a mobile terminal and the right-most communication terminal 12

15 is also a mobile terminal, echo cancellation is disabled in all three nodes 20, 22, 24. The same is true between a mobile terminal and an IP telephone as well as between two IP telephones. When communications are between a mobile terminal and a POTS telephone, the originating node 20 is assigned a low preference, the intermediate node 22 is assigned a medium preference,

20 and the terminating node 24 is assigned a high preference for providing echo cancellation for the communication path. As such, the terminating node 24 will provide echo cancellation since it has the highest preference, and the originating node 20 and intermediate node 22 will not provide echo cancellation.

25 **[0028]** Notably, the tables of Figures 4 and 5 are merely for illustrative purposes according to the example wherein the routing nodes 16 are the primary nodes operating according to the present invention. As noted, the communication terminals 12 may act as nodes, and exchange function lists to determine the relative capabilities of the other nodes along the communication

30 path and access a rule set to determine whether to activate a function that the communication terminal 12 can provide. In such an example, the tables of Figures 4 and 5 would be extended to provide instructional criteria for the communication terminals 12, and the illustrated criteria of Figures 4 and 5 may change depending on the capabilities of the communication terminals 12

and the desires of the network operators to process the traffic being communicated between the communication terminals 12.

**[0029]** With reference to Figure 6, a block representation of a routing node 16 is illustrated according to one embodiment of the present invention. The routing node 16 may include a control system 30 associated with sufficient memory 32 for storing the requisite software 34 and data 36 to operate as described above. The control system 30 will be associated with one or more communication interfaces 38 to facilitate routing between other routing nodes 16 or between a routing node 16 and a communication terminal 12.

**[0030]** With reference to Figure 7, a communication terminal 12 is illustrated. The communication terminal 12 will include a control system 40 having sufficient memory 42 for the requisite software 44 and data 46 to operate as described above. The control system 40 will be associated with a communication interface 48 to interact with an appropriate access point, which may be a routing node 16, and a user interface 50 to facilitate interaction with a user.

**[0031]** The present invention is capable of controlling and allocating the activation of functions throughout the various routing nodes 16 and communication terminals 12 along a particular communication path. The functions may involve any type of operation on the information being routed along the communication path. These functions may include various types of signal processing, including audio signal processing, video signal processing, and the like, in addition to those functions described above. Such processing may include digital signal processing or other forms of data manipulation, as will be understood by those skilled in the art.

**[0032]** Those skilled in the art will recognize improvements and modifications to the preferred embodiments of the present invention. All such improvements and modifications are considered within the scope of the concepts disclosed herein and the claims that follow.

Claims

What is claimed is:

1. A method of determining functions to provide at a given node forming  
5 part of a communication path comprising:
  - at least one of:
    - sending first information identifying at least one of:
      - one or more local functions capable of being provided to  
traffic in the communication path by the given node; and
      - 10 • if available, one or more remote functions capable of  
being provided to the traffic by other nodes forming part  
of the communications path; and
    - receiving second information identifying the one or more  
remote functions; and
  - 15 • determining whether any of the one or more local functions should  
be applied to the traffic based on criteria, which defines how the  
one or more local and remote functions are applied by the given  
and other nodes and is available to the given node and other  
nodes.
- 20 2. The method of claim 1 further comprising applying to the traffic any of  
the one or more local functions, which are determined to be applied to  
the traffic.
3. The method of claim 1 wherein the second information is received from  
at least one of the other nodes that is upstream of traffic flow, and at  
25 least one of the other nodes that is downstream of the traffic flow.
4. The method of claim 3 wherein the at least one of the other nodes that  
is upstream of the traffic flow is a most proximate node upstream of  
traffic flow, and the at least one of the other nodes that is downstream  
of the traffic flow is a most proximate node downstream of the traffic  
30 flow.

5. The method of claim 3 further comprising creating the first information to identify the one or more remote functions provided by the one or more other nodes upstream and downstream of the given node and the local functions.
- 5 6. The method of claim 3 wherein the criteria is further based on a location of the one or more other nodes relative to the given node.
7. The method of claim 1 wherein the second information identifies the one or more remote nodes associated with each of the one or more remote functions.
- 10 8. The method of claim 1 wherein at least one of the one or more local and remote functions is associated with an attribute, which is sent or received with the one or more local and remote functions, the criteria defining how at least one of the one or more local and remote functions are applied based on the attribute.
- 15 9. The method of claim 1 wherein the traffic is voice traffic.
10. The method of claim 1 wherein the given node is at least one of the group consisting of a terminal, an access point, an endpoint, a gateway, and a routing node.
11. The method of claim 1 wherein certain of the one or more local  
20 functions and certain of the one or more remote functions are identical, the criteria defining selection indicia determining which of the one or more local and remote nodes is given priority.
12. A communication node forming part of a communication path comprising:  
25
  - a communication interface; and
  - a control system associated with the communication interface and adapted to:

- at least one of:
    - send first information identifying at least one of:
      - one or more local functions capable of being provided to traffic in the communication path by the communication node; and
      - if available, one or more remote functions capable of being provided to the traffic by other nodes forming part of the communications path; and
    - receive second information identifying the one or more remote functions; and
  - determine whether any of the one or more local functions should be applied to the traffic based on criteria, which defines how the one or more local and remote functions are applied by the communication node and the other nodes and is available to the communication node and the other nodes.
13. The communication node of claim 12 wherein the control system is further adapted to apply to the traffic any of the one or more local functions, which are determined to be applied to the traffic.
14. The communication node of claim 12 wherein the second information is received from at least one of the other nodes that is upstream of traffic flow, and at least one of the other nodes that is downstream of the traffic flow.
15. The communication node of claim 14 wherein the at least one of the other nodes that is upstream of the traffic flow is a most proximate node upstream of the traffic flow, and the at least one of the other nodes that is downstream of the traffic flow is a most proximate node downstream of the traffic flow.
16. The communication node of claim 14 further comprising creating the first information to identify the one or more remote functions provided

by the one or more other nodes upstream and downstream of the communication node, and the local functions.

17. The communication node of claim 14 wherein the criteria is further based on a location of the one or more other nodes relative to the communication node.
18. The communication node of claim 12 wherein the second information identifies the one or more other nodes associated with each of the one or more remote functions.
19. The communication node of claim 12 wherein at least one of the one or more local and remote functions is associated with an attribute, which is sent or received with the one or more local and remote functions, the criteria defining how at least one of the one or more local and remote functions are applied based on the attribute.
20. The communication node of claim 12 wherein the traffic is voice traffic.
21. The communication node of claim 12 wherein the communication node is at least one of the group consisting of a terminal, an access point, an endpoint, a gateway, and a routing node.
22. The communication node of claim 12 wherein certain of the one or more local functions and certain of the one or more remote functions are identical, the criteria defining selection indicia determining which of the one or more other nodes and the communication node is given priority.


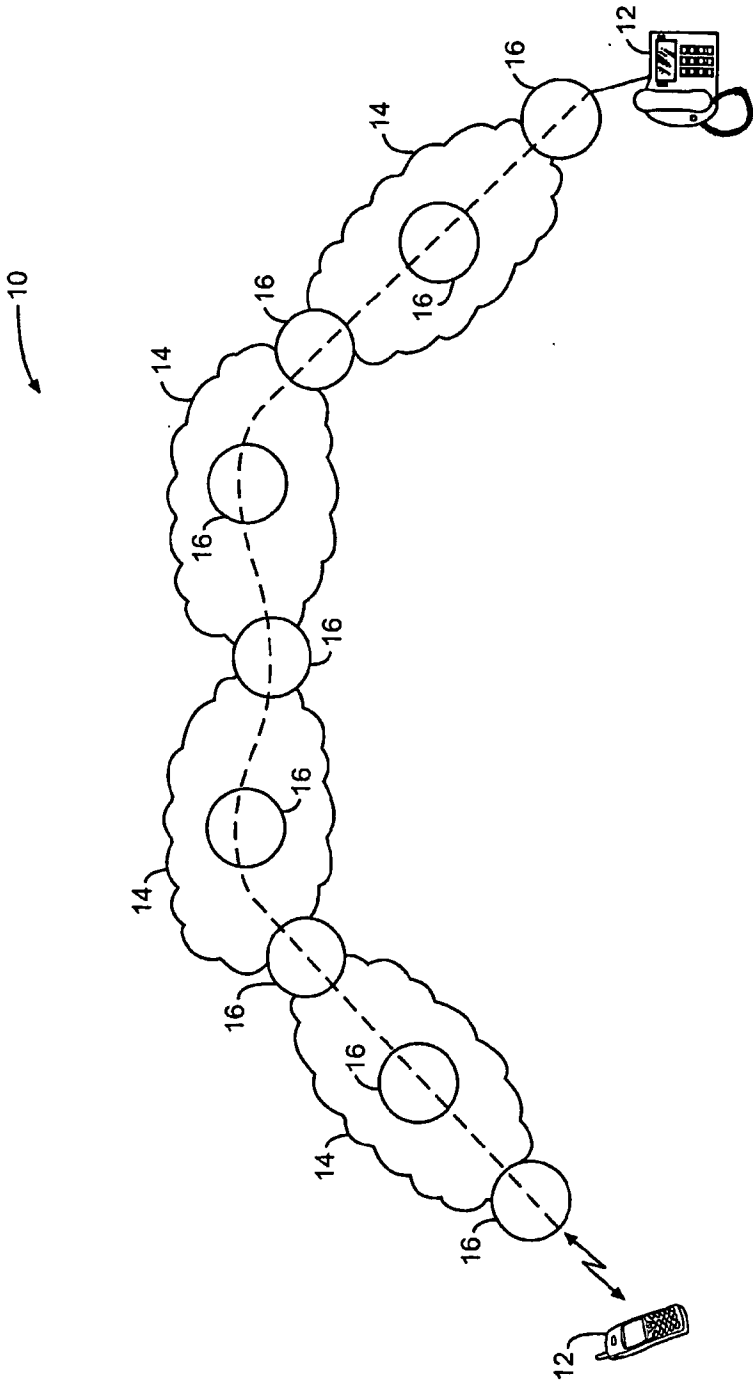


FIG. 1



2/6

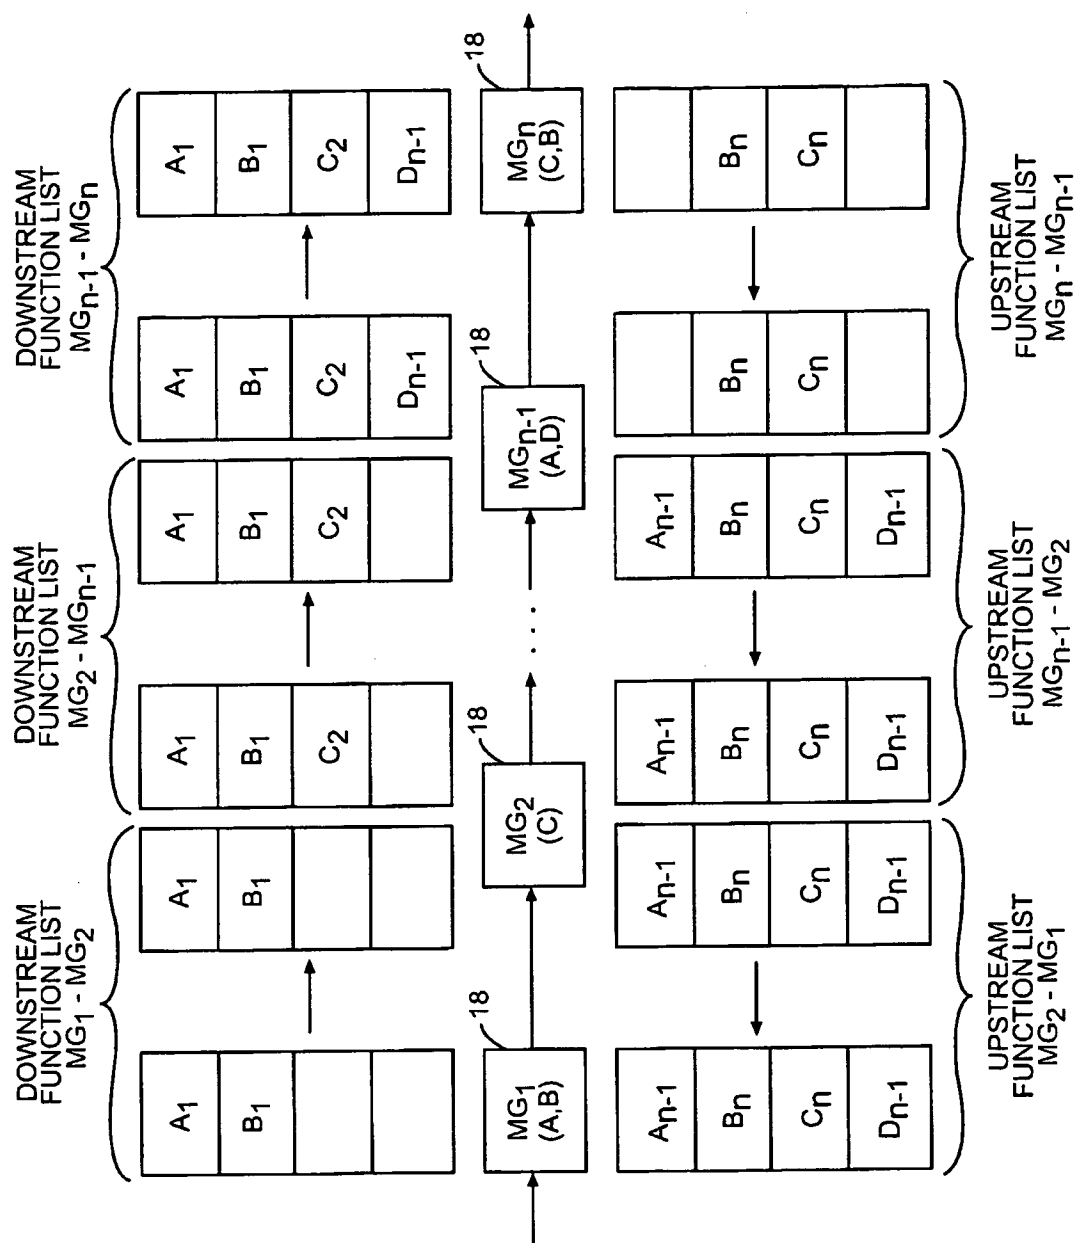

3/6

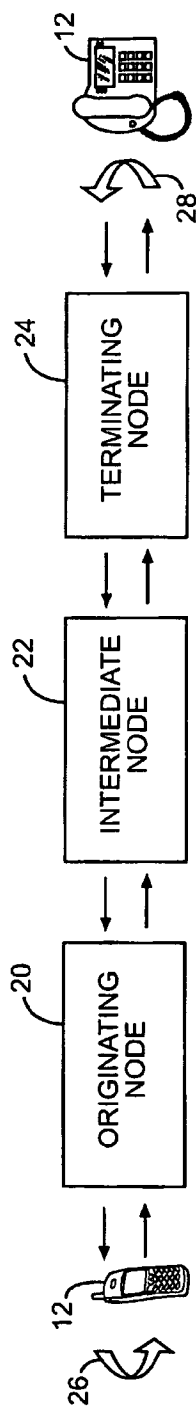


FIG. 3

4/6

VOICE ENHANCEMENT FUNCTION	END-POINT DEVICE	ORIGINATING NODE	INTER- MEDIATE NODE	TERMINATING NODE	END-POINT DEVICE
EC	MOBILE	DISABLE	DISABLE	DISABLE	MOBILE
		DISABLE	DISABLE	DISABLE	IP PHONE
		LOW PREFERENCE	MEDIUM	HIGH PREFERENCE	POTS
	IP PHONE	DISABLE	DISABLE	DISABLE	MOBILE
		DISABLE	DISABLE	DISABLE	IP PHONE
		LOW PREFERENCE	MEDIUM	HIGH PREFERENCE	POTS
	POTS	DISABLE	DISABLE	DISABLE	MOBILE
		DISABLE	DISABLE	DISABLE	IP PHONE
		LOW PREFERENCE	MEDIUM	HIGH PREFERENCE	POTS
AEC	MOBILE	HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	MOBILE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
	IP PHONE	HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	MOBILE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
	POTS	DISABLE	DISABLE	DISABLE	MOBILE
		DISABLE	DISABLE	DISABLE	IP PHONE
		DISABLE	DISABLE	DISABLE	POTS

FIG. 4

5/6

VOICE ENHANCEMENT FUNCTION	END-POINT DEVICE	ORIGINATING NODE	INTER- MEDIATE NODE	TERMINATING NODE	END-POINT DEVICE
NR	MOBILE	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
	IP PHONE	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
	POTS	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
ALC	MOBILE	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	NO PREFERENCE	LOW PREFERENCE	POTS
	IP PHONE	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS
	POTS	NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	MOBILE
		NO PREFERENCE	NO PREFERENCE	NO PREFERENCE	IP PHONE
		HIGH PREFERENCE	MEDIUM	LOW PREFERENCE	POTS

FIG. 5

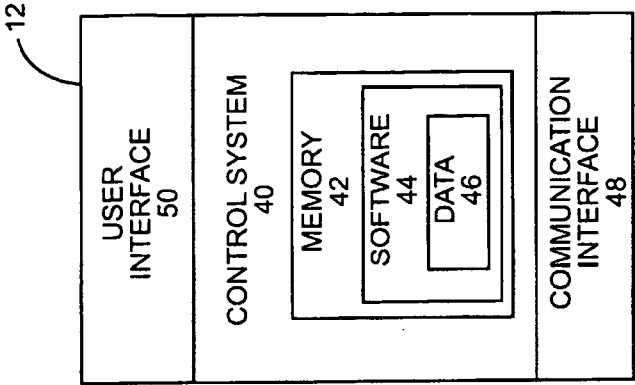


FIG. 7

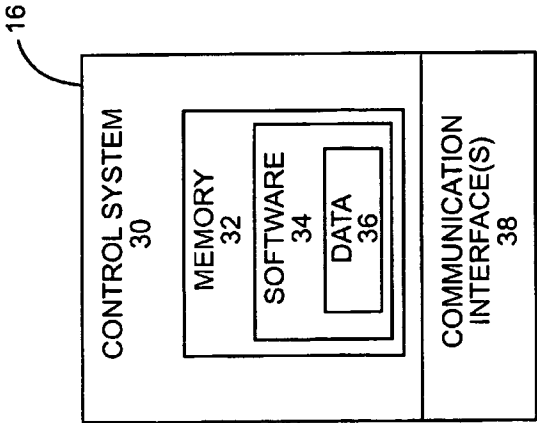


FIG. 6

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number  
**WO 2005/089055 A3**

(51) International Patent Classification<sup>7</sup>: **H04L 12/26**

(21) International Application Number:  
PCT/IB2005/000730

(22) International Filing Date: 21 March 2005 (21.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/554,605 19 March 2004 (19.03.2004) US

(71) Applicant: **NORTEL NETWORKS LIMITED**  
[CA/CA]; 2351 Boulevard Alfred-Nobel, St. Laurent, Quebec H4S 2A9 (CA).

(72) Inventors: **CHU, Chung-Cheung**; 9370 Rameau Street, Brossard, Quebec J4X 2M3 (CA). **RABIPOUR, Rafi**; 5745 Blossom Avenue, Cote Saint-Luc, Quebec H4M 2Y1 (CA). **YUE, Peter**; 987 White Street, Apt. 204, St. Laurent, Quebec H4M 2Y1 (CA).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only


Published:

— with international search report

(88) Date of publication of the international search report:  
30 March 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMMUNICATING PROCESSING CAPABILITIES ALONG A COMMUNICATIONS PATH

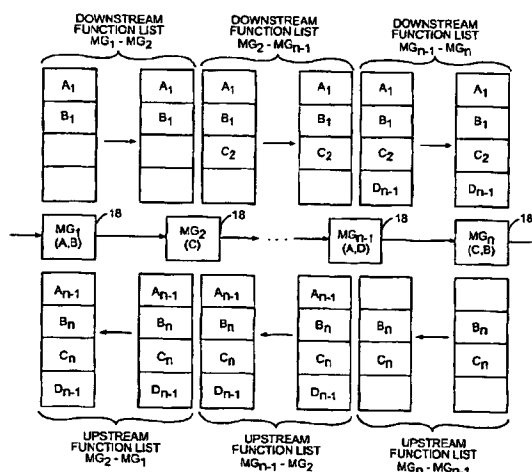

(57) Abstract: The present invention provides a technique for determining which nodes are to provide various functions on traffic along a particular communication path. Generally, a communication path may include multiple nodes between which and through which traffic is routed. These nodes may include the communication terminals at either end of the communication path, as well as various types of routing nodes along the communication path. Each node will send to other nodes in the communication path information identifying the local functions it is capable of providing to the traffic carried in the communication path, and if available, remote functions capable of being provided to the traffic by other nodes in the communication path. Each node will receive from other nodes in the communication path information bearing on the remote functions. Each node will access criteria to determine whether any local functions should be applied to the traffic.

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB2005/000730

## CLASSIFICATION OF SUBJECT MATTER IPC(7): H04L 12/26

According to International Patent Classification (IPC) or to both national classification and IPC

### B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC(7): H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)  
Delphion, Derwent, Qweb-PlusPat, Canadian Patent Database, IEEE. Some keywords used: node/terminal/station/unit/host, exchange/share/communicate/inform, available/local/proper, capabilities/functions, path/segment/line/connection/link, determine/judge/decide/ascertain/monitor/evaluate, echo cancellation, noise reduction, gain control, routing/switching.

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CA 2 336 699 A1 (Segura et al.) 13 January 2000 (13-01-2000)	1-10, 12-21
A	*abstract* *page 2, lines 7 - 28* *page 3, lines 12 - 30* *page 4, line 10 - page 5, line 7* *page 6, lines 4 - 16* *page 7, lines 15 - 25* *Figures 1, 2*	11,22
Y	WO 2004/019568 A2 (Wielgosz et al.) 4 March 2004 (04-03-2004)	1-10, 12-21
A	*abstract* *page 2, line 1 - page 4, line 22* *page 14, lines 6 - 22* *Figures 1, 6*	11, 22

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 September 2005 (21-09-2005)

Date of mailing of the international search report

03 October 2005 (03-10-2005)

Name and mailing address of the ISA/CA  
Canadian Intellectual Property Office  
Place du Portage I, C114 - 1st Floor, Box PCT  
50 Victoria Street  
Gatineau, Quebec K1A 0C9  
Facsimile No.: 001(819)953-2476

Authorized officer

Georges Matar (819) 994-6366

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB2005/000730

## Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/052414 A1 (Lavarec et al.) 4 July 2002 (04-07-2002) *abstract* *page 2, line 4 - page 3, line 4* *page 4, lines 1 - 16* *page 9, line 24 - page 10, line 11* *Figure 1*	1, 11, 12, 22
A	US 6 553 423 B1 (Chen) 22 April 2003 (22-04-2003) *abstract* *column 3, lines 10 c- 35* *column 4, lines 6 - 41* *Figures 4, 5*	1-7, 10, 12-18, 21
A	US 6 009 467 A (Ratcliff et al.) 28 December 1999 (28-12-1999) *abstract* *column 4, line 59 - column 6, line 38* *Figures 2, 3*	1, 12
A	US 2003/0005106 A1 (Isoda) 2 January 2003 (02-01-2003) *abstract* *paragraphs [0016], [0017], [0022], [0023]*	1, 12



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/IB2005/000730**

Parent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CA2336699 A1	13-01-2000	AU4943399 A	24-01-2000
		BR9911896 A	27-03-2001
		US6246879 B1	12-06-2001
		WO0002350 A1	13-01-2000
WO2004019568 A2	04-03-2004	AU2003265030 A1	11-03-2004
		EP1540901 A2	15-06-2005
		PL355743 A1	08-03-2004
WO02052414 A1	04-07-2002	CA2432384 A1	04-07-2002
		CN1486460 A	31-03-2004
		EP1344131 A1	17-09-2003
		FR2818774 A1	28-06-2002
		IL156482D D0	04-01-2004
		JP2004521412T	15-07-2004
		US6859847 B2	22-02-2005
US6553423 B1	22-04-2003	none	
US6009467 A	28-12-1999	none	
US2003005106 A1	02-01-2003	CN1394413 A	29-01-2003
		EP1241834 A1	18-09-2002
		JP2002141966 A	17-05-2002
		WO0237769 A1	10-05-2002

THIS PAGE BLANK (USPTO)